

# Variable speed drives

## **Altivar 11**

### Real efficiency *at a reduced size !...*

Catalogue  
February

# 04



For asynchronous motors from 0.18 to 2.2 kW



# Variable speed drives for asynchronous motors

---


## Altivar 11

■ Presentation .....	pages 2 and 3
■ References .....	pages 4 and 7
■ Characteristics .....	pages 8 to 10
■ Combinations (motors-starters) .....	page 11
■ Dimensions, mounting .....	pages 12 and 13
■ Schemes, connections .....	pages 14 and 15
■ PowerSuite software workshop advanced dialogue solutions . . .	pages 16 and 17
■ Functions .....	pages 18 to 23
■	


# Variable speed drives for asynchronous motors

Altivar 11


561250

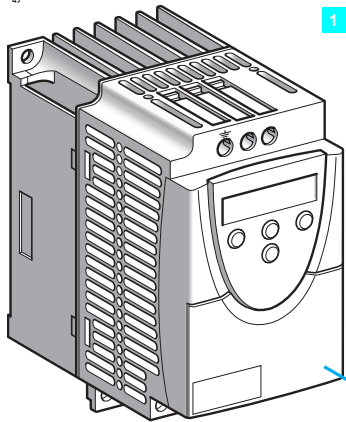


1

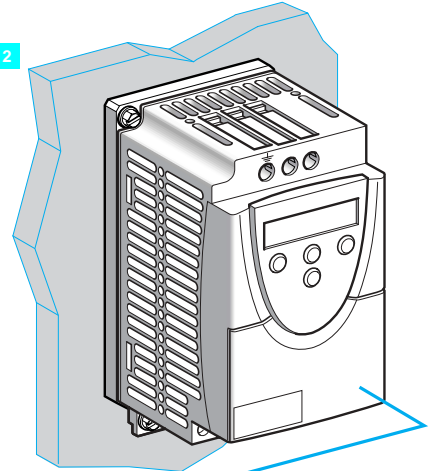


2

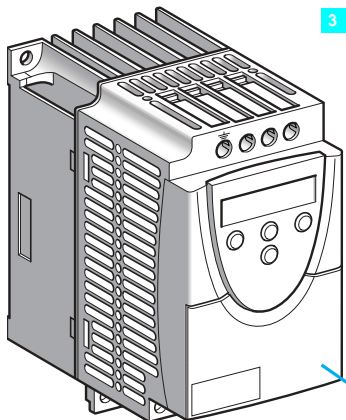


3

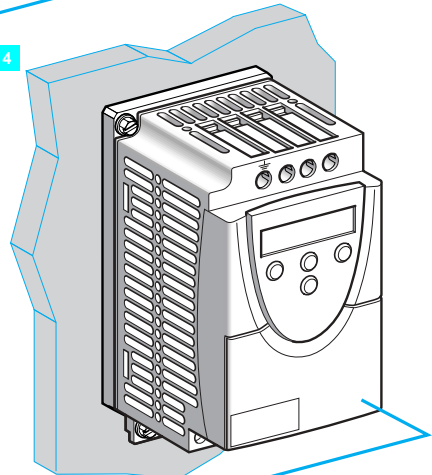


4

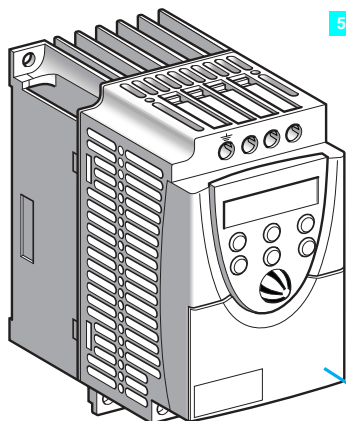

5

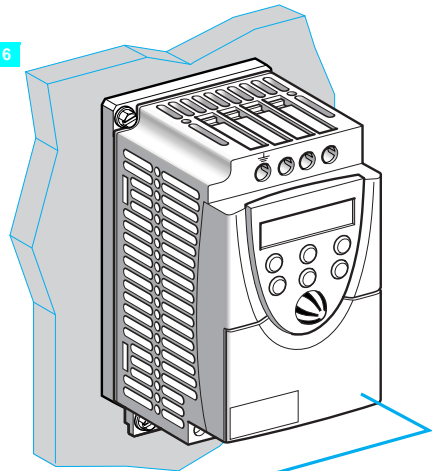

6

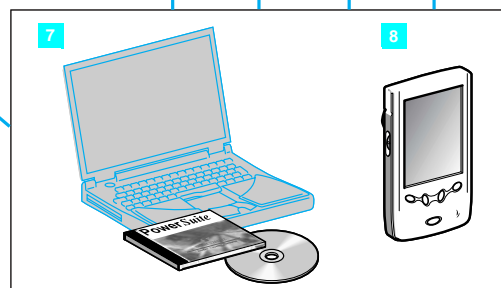

7

8

# Variable speed drives for asynchronous motors

## Altivar 11

### Applications

The Altivar 11 is a frequency inverter for 3-phase squirrel cage asynchronous motors rated between 0.18 kW and 2.2 kW.

There are three types of power supply:

- 100 V to 120 V single phase.
- 200 V to 240 V single phase.
- 200 V to 230 V 3-phase.

The Altivar 11 incorporates specific features for local markets (Europe range, America range, Asia range) and has functions suitable for the most common applications, including:

- Horizontal materials handling (small conveyors, etc).
- Ventilation, pumping, access control, automatic doors.
- Special machines (mixers, washing machines, centrifuges, etc).

### Functions

The main functions incorporated in the Altivar 11 drive are:

- Starting and speed control.
- Reversal of operation direction.
- Acceleration, deceleration, stopping.
- Motor and drive protection.
- 2-wire/3-wire control.
- 4 preset speeds.
- Saving the configuration in the drive.
- d.c. injection on stopping.
- Ramp switching.
- Catching a spinning load.
- Local controls (Asia range only).

Several functions can be assigned to one logic input.

### Standard versions

The Altivar 11 offer consists of 3 ranges designed for 3 different markets:

■ **Europe range: ATV 11●U●●M2E** (items 1, 2)

- power supply: 240 V single phase,
- positive logic operation,
- integrated class B EMC filter.

■ **America range: ATV 11●U●●●●U** (items 1, 2, 3, 4)

- power supplies: 120 V single phase, 240 V single phase or 230 V 3-phase,
- positive logic operation,
- meets current requirement in standard NEC 1999 208 V.

■ **Asia range: ATV 11●U●●●●A** (items 5, 6)

- power supplies: 120 V single phase, 240 V single phase or 230 V 3-phase,
- positive or negative logic operation,
- local controls: Run and Stop keys, and potentiometer.

Altivar 11 drives are supplied either with heatsink (items 1, 3, 5) for normal environments and ventilated enclosures, or on a base plate (items 2, 4, 6) for mounting on a machine frame, when the size of the frame enables dissipation of the heat.

### Electromagnetic compatibility EMC

The incorporation of EMC filters in **ATV 11●U●●M2E** drives simplifies installation of machines and provides an economical means of meeting CE marking requirements. **ATV 11●U●●●●U** and **ATV 11●U●●●●A** drives are available without EMC filter. Filters are available as an option for customer assembly, if conformity to EMC standards is required.

### Options

The drive only communicates, in point-to-point mode, with the following tools and software:

- PowerSuite advanced dialogue solution:
  - PowerSuite software workshop for configuring the drive (item 7),
  - PowerSuite for Pocket PC (item 8),
  - converter for connecting a PC or a Pocket PC.

The following options can be used with the Altivar 11 drive:

- Braking module connected to the drive's DC bus.
- Braking resistors, for dissipating the energy returned to the drive when the motor is operating as a generator.
- EMC radio interference input filters.
- Plates for mounting on U rail.
- Adaptor plate for replacing an Altivar 08 drive.
- Plate for EMC mounting, earthing the cable shielding.

# Variable speed drives for asynchronous motors

Altivar 11

ATV 11●●●●●●E Europe range



ATV 11 HU18M2E



ATV 11 PU18M2E



ATV 11 HU41M2E

## Drives with heatsink (frequency range from 0 to 200 Hz)

Motor	Line supply (1)	Altivar 11				
Power indicated on plate	Max. line current for prospective Isc 1 kA	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	Reference (4)	Weight
kW	A	A	A	W		kg
Single phase supply voltage: 200...240 V 50/60 Hz						
0.18	2.9	1.1	1.6	12	ATV 11HU05M2E	0.900
0.37	5.3	2.1	3.1	20.5	ATV 11HU09M2E	1.000
0.55	6.3	3	4.5	29	ATV 11HU12M2E	1.100
0.75	8.6	3.6	5.4	37	ATV 11HU18M2E	1.100
1.5	14.8	6.8	10.2	72	ATV 11HU29M2E (5)	1.800
2.2	20.8	9.6	14.4	96	ATV 11HU41M2E (5)	1.800

## Drives on base plate (frequency range from 0 to 200 Hz)

Motor	Line supply (1)	Altivar 11				
Power indicated on plate	Max. line current for prospective Isc 1 kA	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	Reference (4)	Weight
kW	A	A	A	W		kg
Single phase supply voltage: 200...240 V 50/60 Hz						
0.37	5.3	2.1	3.1	20.5	ATV 11PU09M2E	0.900
0.55	6.3	3	4.5	29	ATV 11PU12M2E	0.900
0.75	8.6	3.6	5.4	37	ATV 11PU18M2E	0.900

(1) Line voltage 230 V.

(2) The current value is given for a 4 kHz switching frequency. If operation above 4 kHz needs to be continuous, the nominal drive current should be derated by 10 % for 8 kHz, 20 % for 12 kHz and 30 % for 16 kHz.

(3) For 60 seconds.

(4) Drive supplied with an integrated EMC filter which cannot be disconnected.

(5) With integrated fan.

# Variable speed drives for asynchronous motors

Altivar 11

ATV 11●●●●●U America range



ATV 11HU18M2U



ATV 11PU18M2U



ATV 11HU41M2U



ATV 11HU41M3U

## Drives with heatsink (frequency range from 0 to 200 Hz)

Motor	Line supply	Altivar 11			Reference	Weight
Power indicated on plate	Max. line current (1)	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	(4)	
kW/HP	A	A	A	W		kg

### Single phase supply voltage: 100...120 V 50/60 Hz

0.18/0.25	6	1.6 (6)	2.4	14.5	ATV 11HU05F1U	0.900
0.37/0.5	9	2.4 (6)	3.6	23	ATV 11HU09F1U	1.000
0.75/1	18	4.6 (6)	6.3	43	ATV 11HU18F1U (5)	1.800

### Single phase supply voltage: 200...240 V 50/60 Hz

0.18/0.25	3.3	1.6	2.4	14.5	ATV 11HU05M2U	0.900
0.37/0.5	6	2.4	3.6	23	ATV 11HU09M2U	1.000
0.75/1	9.9	4.6	6.3	43	ATV 11HU18M2U (5)	1.100
1.5/2	17.1	7.5	11.2	77	ATV 11HU29M2U (5)	1.800
2.2/3	24.1	10.6	15	101	ATV 11HU41M2U (5)	1.800

### 3-phase supply voltage: 200...230 V 50/60 Hz

0.18/0.25	1.8	1.6	2.4	13.5	ATV 11HU05M3U	0.900
0.37/0.5	3.6	2.4	3.6	24	ATV 11HU09M3U	1.000
0.75/1	6.3	4.6	6.3	38	ATV 11HU18M3U (5)	1.100
1.5/2	11	7.5	11.2	75	ATV 11HU29M3U (5)	1.800
2.2/3	15.2	10.6	15	94	ATV 11HU41M3U (5)	1.800

## Drives on base plate (frequency range from 0 to 200 Hz)

Motor	Line supply	Altivar 11			Reference	Weight
Power indicated on plate	Max. line current (1)	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	(4)	
kW/HP	A	A	A	W		kg

### Single phase supply voltage: 100...120 V 50/60 Hz

0.37/0.5	9	2.4	3.6	23	ATV 11PU09F1U	0.900
----------	---	-----	-----	----	---------------	-------

### Single phase supply voltage: 200...240 V 50/60 Hz

0.37/0.5	6	2.4	3.6	23	ATV 11PU09M2U	0.900
0.75/1	9.9	4.6	6.3	43	ATV 11PU18M2U	0.900

### 3-phase supply voltage: 200...230 V 50/60 Hz

0.37/0.5	3.6	2.4	3.6	24	ATV 11PU09M3U	0.900
0.75/1	6.3	4.6	6.3	38	ATV 11PU18M3U	0.900

(1) The line current value is given for the measurement conditions indicated in the table below.

Drive rating	Prospective Isc	Line voltage
ATV 11●UF1U	1 kA	100 V
ATV 11●UM2U	1 kA	208 V
ATV 11●UM3U	5 kA	208 V

(2) The current value is given for a 4 kHz switching frequency. If operation above 4 kHz needs to be continuous, the nominal drive current should be derated by 10 % for 8 kHz, 20 % for 12 kHz and 30 % for 16 kHz.

(3) For 60 seconds.

(4) Drive supplied without EMC filter. To order an EMC filter separately, see page 7.

(5) With integrated fan.

(6) Current given for the power supply for a 230 V 3-phase motor.



# Variable speed drives for asynchronous motors

Altivar 11

ATV 11●●●●●●A Asia range



ATV 11HU18M2A



ATV 11PU18M2A



ATV 11HU41M2A



ATV 11HU41M3A

## Drives with heatsink (frequency range from 0 to 200 Hz)

Motor	Line supply	Altivar 11			Reference	Weight
Power indicated on plate	Max. line current (1)	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	(4)	
kW	A	A	A	W		kg
Single phase supply voltage: 100...120 V 50/60 Hz						
0.18	6	1.4 (6)	2.1	14	ATV 11HU05F1A	0.900
0.37	9	2.4 (6)	3.6	25	ATV 11HU09F1A	1.000
0.75	18	4 (6)	6	40	ATV 11HU18F1A (5)	1.800
Single phase supply voltage: 200...240 V 50/60 Hz						
0.18	3.3	1.4	2.1	14	ATV 11HU05M2A	0.900
0.37	6	2.4	3.6	25	ATV 11HU09M2A	1.000
0.75	9.9	4	6	40	ATV 11HU18M2A	1.100
1.5	17.1	7.5	11.2	78	ATV 11HU29M2A (5)	1.800
2.2	24.1	10	15	97	ATV 11HU41M2A (5)	1.800
3-phase supply voltage: 200...230 V 50/60 Hz						
0.18	1.8	1.4	2.1	13.5	ATV 11HU05M3A	0.900
0.37	3.6	2.4	3.6	24	ATV 11HU09M3A	1.000
0.75	6.3	4	6	38	ATV 11HU18M3A	1.100
1.5	11	7.5	11.2	75	ATV 11HU29M3A (5)	1.800
2.2	15.2	10	15	94	ATV 11HU41M3A (5)	1.800

## Drives on base plate (frequency range from 0 to 200 Hz)

Motor	Line supply	Altivar 11			Reference	Weight
Power indicated on plate	Max. line current (1)	Continuous output current (2)	Max. transient current (3)	Power dissipated at nominal load	(4)	
kW	A	A	A	W		kg
Single phase supply voltage: 100...120 V 50/60 Hz						
0.37	9	2.4	3.6	25	ATV 11PU09F1A	0.900
Single phase supply voltage: 200...240 V 50/60 Hz						
0.37	6	2.4	3.6	25	ATV 11PU09M2A	0.900
0.75	9.9	4	6	40	ATV 11PU18M2A	0.900
3-phase supply voltage: 200...230 V 50/60 Hz						
0.37	3.6	2.4	3.6	24	ATV 11PU09M3A	0.900
0.75	6.3	4	6	38	ATV 11PU18M3A	0.900

(1) The line current value is given for the measurement conditions indicated in the table below.

Drive rating	Prospective Isc	Line voltage
ATV 11●UF1A	1 kA	100 V
ATV 11●UM2A	1 kA	200 V
ATV 11●UM3A	5 kA	200 V

(2) The current value is given for a 4 kHz switching frequency. If operation above 4 kHz needs to be continuous, the nominal drive current should be derated by 10 % for 8 kHz, 20 % for 12 kHz and 30 % for 16 kHz.

(3) For 60 seconds.

(4) Drive supplied without EMC filter. To order an EMC filter separately, see page 7.

(5) With integrated fan.

(6) Current given for the power supply for a 230 V 3-phase motor.



# Variable speed drives for asynchronous motors


## Altivar 11



VW3 A5870



VW3 A5873



VW3 A11852

### Options

Description	For drives	Reference	Weight kg
<b>PowerSuite advanced dialogue solution</b>	All ratings	See page 17	—
<b>Converter, supplied without cable or CD-ROM, for communicating with the PowerSuite software workshop (see page 17)</b>	All ratings	VW3 A11301	0.070
<b>EMC input filters</b>	ATV 11HU05M2E, HU09M2E ATV 11HU12M2E, HU18M2E ATV 11HU05F1U/A, HU09F1U/A ATV 11HU05M2U/A, U09M2U/A ATV 11HU18M2U/A	VW3 A11401	0.650
	ATV 11HU29M2E, HU41M2E ATV 11HU18F1U/A, HU29M2U/A ATV 11HU41M2U/A	VW3 A11402	0.850
	ATV 11HU05M3U/A, HU09M3U/A ATV 11HU18M3U/A	VW3 A11403	0.650
	ATV 11HU29M3U/A, HU41M3U/A	VW3 A11404	0.850
<b>Braking module connected to the DC bus</b>	All ratings	VW3 A11701	0.250

Description	Ohmic value	Power W	For drives	Reference	Weight kg
<b>Braking resistors</b> Not protected (IP 00) (4)	100 Ω	32	ATV 11HU05●●● (1) ATV 11●U09●●● (1) ATV 11●U12M2E (1) ATV 11●U18●●● (1) ATV 11HU29●●● (2)	VW3 A58702	0.600
	68 Ω	32	ATV 11HU41●●● (2)	VW3 A58704	0.600
<b>Braking resistors</b> Protected (IP 30) (4)	100 Ω	32	ATV 11HU05●●● (1) ATV 11●U09●●● (1) ATV 11●U12M2E (1) ATV 11●U18●●● (1) ATV 11HU29●●● (2)	VW3 A58732	2.000
	68 Ω	32	ATV 11HU41●●● (2)	VW3 A58733	2.000

### Accessories

Description	For drives	Reference	Weight kg
<b>Plates for mounting on rail (width 35 mm)</b>	ATV 11HU05●●● ATV 11HU09●●● ATV 11HU12M2E ATV 11HU18M●●	VW3 A11851	0.220
	ATV 11HU18F1● ATV 11HU29●●● ATV 11HU41●●●	VW3 A11852	0.300
<b>Adaptor plate for replacing Altivar 08</b>	ATV 11HU05M2● ATV 11●U09M2● ATV 11●U12M2E ATV 11●U18M2●	VW3 A11811	0.220
<b>Earthing plate for EMC mounting</b>	All ratings	VW3 A11831	0.100
<b>Fan kit (3)</b>	ATV 11HU18F1● ATV 11HU18M●U ATV 11HU29●●● ATV 11HU41●●●	VW3 A11821	0.070

(1) Minimum value of the resistor to be connected: 75 ohms.

(2) Minimum value of the resistor to be connected: 51 ohms.


(3) "Low-noise" fan.

(4) If a resistor other than those specified is being used, add a thermal protection device.

# Variable speed drives for asynchronous motors

## Altivar 11

### Environment

<b>Conforming to standards</b>		Altivar 11 drives have been developed to conform to the strictest international standards and the recommendations relating to electrical industrial control devices (IEC, EN), in particular: EN 50178, EMC immunity and EMC conducted and radiated emissions.
EMC immunity		<ul style="list-style-type: none"> <li>■ IEC/EN 61000-4-2 level 3</li> <li>■ IEC/EN 61000-4-3 level 3</li> <li>■ IEC/EN 61000-4-4 level 4</li> <li>■ IEC/EN 61000-4-5 level 3 (power access)</li> <li>■ IEC/EN 61800-3, environments 1 and 2</li> </ul>
EMC emissions for drives		
Conducted and radiated emissions	All	■ IEC/EN 61800-3, environments: 2 (industrial supply) and 1 (public supply) restricted distribution
	ATV 11●U05M2E to ATV 11●U18M2E	■ EN 55011, EN 55022 class B, 2 to 12 kHz for motor cable lengths ≤ 5 m and class A (group 1), 2 to 16 kHz for lengths ≤ 10 m
	ATV 11●U29M2E to ATV 11●U41M2E	■ EN 55011, EN 55022 class B, 4 to 16 kHz for motor cable lengths ≤ 5 m and class A (group 1), 4 to 16 kHz for lengths ≤ 10 m
Conducted emissions	ATV 11HU05M2E to ATV 11HU41M2E	■ With additional EMC filter: EN 55011, class B, 2 to 16 kHz for motor cable lengths ≤ 20 m and class A (group 1), 2 to 16 kHz for lengths ≤ 50 m
	ATV 11HU05●●U to ATV 11HU41●●U and ATV 11HU05●●A to ATV 11HU41●●A	■ With additional EMC filter: EN 55011, class B, 2 to 16 kHz for motor cable lengths ≤ 5 m and class A (group 1), 2 to 16 kHz for lengths ≤ 50 m
<b>CE marking</b>		The drives bear CE marking in accordance with the European low voltage (73/23/EEC and 93/68/EEC) and EMC (89/336/EEC) directives
<b>Product certifications</b>		UL, CSA, NOM 117 and C-TICK
<b>Degree of protection</b>		IP 20
<b>Vibration resistance</b>	Drive without □ rail option	Conforming to IEC/EN 60068-2-6: - 1.5 mm peak from 3 to 13 Hz - 1 gn from 13 to 200 Hz
<b>Shock resistance</b>		15 gn for 11 ms conforming to IEC/EN 60068-2-27
<b>Relative humidity</b>		% 5...93 without condensation or dripping water, conforming to IEC 60068-2-3
<b>Ambient temperature</b>	Storage	°C - 25...+ 65
	Operation	°C - 10...+ 40 - 10...+ 50: removing the protective cover from the top of the drive Up to + 60 with current derating of 2.2 % per °C above 50 °C
<b>Maximum operating altitude</b>		m 1000 without derating (above this, derate the current by 1 % per additional 100 m)
<b>Operating position</b> Maximum permanent angle in relation to the normal vertical mounting position		

### Drive characteristics

<b>Output frequency range</b>	Hz	0...200
<b>Switching frequency</b>	kHz	2...16 (1)
<b>Speed range</b>		1...20
<b>Transient overtorque</b>		150...170 % of the nominal motor torque
<b>Braking torque</b>		<ul style="list-style-type: none"> <li>- 20 % of the nominal motor torque without braking resistor at no-load with the "deceleration ramp adaptation" function enabled</li> <li>- 80 % of the nominal motor torque with braking resistor (available as an option) at no-load</li> <li>- Up to 150 % of the nominal motor torque with braking resistor (available as an option) at high inertia</li> </ul>
<b>Maximum transient current</b>		<ul style="list-style-type: none"> <li>- 150 % of the nominal drive current for 60 seconds for range E and A drives</li> <li>- 137...150 % for range U drives</li> </ul>
<b>Voltage/frequency ratio</b>		Sensorless flux vector control with PWM type (2) motor control signal Factory-set for most constant torque applications
<b>Frequency loop gain</b>		Factory-set with the speed loop stability and gain Possible correction for machines with high resistive torque or high inertia, or for machines with fast cycles
<b>Slip compensation</b>		Factory-set, according to the rating of the drive (adjustment possible)

(1) If operation above 4 kHz needs to be continuous, the nominal drive current should be derated by 10 % for 8 kHz, 20 % for 12 kHz and 30 % for 16 kHz.

(2) Pulse width modulation

# Variable speed drives for asynchronous motors

## Altivar 11


Electrical characteristics			
Power supply	Voltage	V	200 - 15 % to 240 + 10 % single phase for ATV 11●U●●M2● 200 - 15 % to 230 + 15 % 3-phase for ATV 11●U●●M3● 100 - 15 % to 120 + 10 % single phase for ATV 11●U●●F1●
	Frequency	Hz	50 ± 5 % or 60 ± 5 %
	Isc	A	≤ 1000 (prospective short-circuit current at the connection point) for single phase power supply ≤ 5000 (prospective short-circuit current at the connection point) for 3-phase power supply
Output voltage			Maximum 3-phase voltage equal to: - the line supply voltage for ATV 11●U●●M●● - double the line supply voltage for ATV 11●U●●F1●
Maximum connection capacity of the power supply, the motor and the braking module	Drive ATV 11●U05●●●, U09●●●, U12M●●, U18M●●		1.5 mm <sup>2</sup> (AWG 14)
	Drive ATV 11●, U18F1●, U29●●●, U41●●●		4 mm <sup>2</sup> (AWG 10)
Max. length of motor cables		m	50, shielded cable 100, non-shielded cable
Electrical isolation			Electrical isolation between power and control (inputs, outputs, power supplies)
Available internal supplies			Short-circuit and overload protection: - one + 5 V (0/+ 5 %) supply for the reference potentiometer (2.2 to 10 kΩ), maximum current 10 mA - one + 15 V (± 15 %) supply for the control inputs, maximum current 100 mA
Analog input AI1			1 configurable analog input Max. sampling time: 20 ms, resolution 0.4 %, linearity ± 5 %: - voltage 0-5 V (internal power supply only) or 0-10 V, impedance 40 kΩ - current 0-20 mA or 4-20 mA (without addition of a resistor), impedance 250 Ω
Logic inputs LI			4 assignable logic inputs, impedance 5 kΩ + 15 V internal or 24 V external power supply (min. 11 V, max. 30 V). Factory-set with 2-wire control in "transition" mode for machine safety, for Europe and America ranges: - LI1: forward - LI2: reverse - LI3/LI4: 4 preset speeds - local controls for the Asia range Multiple assignment makes it possible to mix several functions on one input (example: LI1 assigned to forward and preset speed 2, LI3 assigned to reverse and preset speed 3)
	Positive logic E/U/A ranges		State 0 if < 5 V, state 1 if > 11 V Max. sampling time: 20 ms
	Negative logic A range		Available by programming on the Asia range only State 0 if > 11 V or logic input not wired, state 1 if < 5 V Max. sampling time: 20 ms
DO output			Factory setting: - 2 kHz PWM (1) open collector output. Can be used for electromagnetic galvanometer - max. current 10 mA - output impedance 1 kΩ, linearity ± 1 %, max. sampling time 20 ms Assignable as logic output: - open collector logic output, output impedance 100 Ω, 50mA max - internal voltage (see above, available internal supplies) - external voltage 30 V max: 50 mA
Relay outputs (RA-RC)			1 protected relay logic output (contact open on fault) Minimum switching capacity: 10 mA for --- 24 V Maximum switching capacity: ■ On resistive load (cos φ = 1 and L/R = 0 ms): 5 A for ~ 250 V or --- 30 V ■ On inductive load (cos φ = 0.4 and L/R = 7 ms): 2 A for ~ 250 V or --- 30 V
Maximum I/O connection capacity			1.5 mm <sup>2</sup> (AWG 14)
Acceleration and deceleration ramps			Ramp profiles: linear from 0.1 to 99.9 s Automatic adaptation of deceleration ramp time if braking capacities exceeded, possible inhibition of this adaptation (use of braking module)
Braking to a standstill			By d.c. injection: automatically as soon as the estimated output frequency drops to < 0.2 Hz, period adjustable from 0.1 to 30 s or continuous, current adjustable from 0 to 1.2 In
Main protection and safety features of the drive			■ Thermal protection against overheating ■ Protection against short-circuits between output phases ■ Protection against overcurrent between output phases and earth, at power-up only ■ Line supply undervoltage and overvoltage safety circuits ■ Line supply phase loss safety function, for 3-phase supply
Motor protection (see page 22)			Thermal protection integrated in the drive by continuous calculation of the I <sup>2</sup> t. Thermal memory reset on power down.
Insulation resistance to earth		MΩ	> 500 (electrical isolation)
Frequency resolution			Display units: 0.1 Hz Analog inputs: 10-bit A/D converter
Time constant for reference change		ms	5

(1) Pulse width modulation

# Variable speed drives for asynchronous motors Altivar 11

## Torque characteristics (typical curves)

The curves below define the available continuous torque and transient overtorque for both force-cooled and self-cooled motors. The only difference is in the ability of the motor to provide a high continuous torque at less than half the nominal speed.

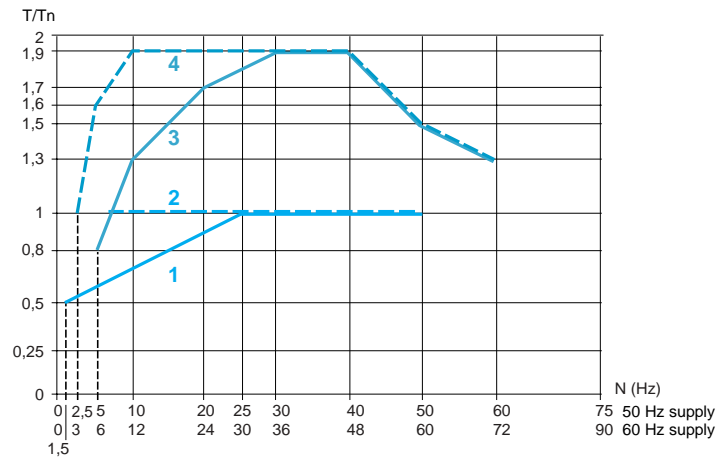

- 1 Self-cooled motor: continuous useful torque
- 2 Force-cooled motor: continuous useful torque
- 3 Transient overtorque in factory settings (UFR = 50), with motor characteristics
- 4 Transient overtorque at UFR = 100 and motor characteristics

## Special uses

### Use with a motor with a different rating to that of the drive

The device can supply any motor which has a power rating lower than that for which it is designed.

For motor ratings slightly higher than that of the drive, check that the current taken does not exceed the continuous output current of the drive.

### Connecting motors in parallel

The rating of the drive must be greater than or equal to the sum of the currents of the motors to be connected to the drive. In this case, provide external thermal protection for each motor using probes or thermal overload relays.

If the number of motors in parallel is greater than or equal to 3, it is advisable to install a 3-phase choke between the drive and the motors.

**Note:** please consult your Regional Sales Office for choke product references.

### Switching the motor at the drive output

Switching is possible with the drive locked. The "catch-on-the-fly" (automatic catching a spinning load) function must be configured for this type of use.

# Variable speed drives for asynchronous motors

## Altivar 11

### Combinations for customer assembly

**Function:** to protect persons and equipment from any level of overcurrent which may be encountered (overload or short-circuit).  
Type 1 coordination.

Standard power ratings of 3-phase 4-pole 50/60 Hz motors	Speed drive Reference (1)	Circuit-breaker			Contactor Reference
		Telemecanique (2)	Adjustment range	Maximum short-circuit current Icu	
		Merlin Gerin	Rating		
kW			A	kA	
M1	A1	Q1			KM1
Single phase supply voltage: 100...120 V 50/60 Hz					
0.18	ATV 11HU05F1●	GV2 ME14	6...10	> 50	LC1 K09
		DT40	10	6	LC1 K09
0.37	ATV 11●U09F1●	GV2 ME14	6...10	> 50	LC1 K09
		DT40	16	6	LC1 K09
0.75	ATV 11HU18F1●	GV2 ME21	17...23	> 15	LC1 D25
		DT40	20	6	LC1 D25
Single phase supply voltage: 200...240 V 50/60 Hz					
0.18	ATV 11HU05M2●	GV2 ME08	2.5...4	> 50	LC1 K09
		DT40	6	6	LC1 K09
0.37	ATV 11●U09M2●	GV2 ME14	6...10	> 50	LC1 K09
		DT40	10	6	LC1 K09
0.55	ATV 11●U12M2E	GV2 ME14	6...10	> 50	LC1 K09
		DT40	10	6	LC1 K09
0.75	ATV 11●U18M2●	GV2 ME16	9...14	> 15	LC1 K12
		DT40	16	6	LC1 K12
1.5	ATV 11HU29M2E	GV2 ME20	13...18	> 15	LC1 D18
		DT40	20	6	LC1 D18
1.5	ATV 11HU29M2U ATV 11HU29M2A	GV2 ME21	17...23	> 15	LC1 D25
		DT40	20	6	LC1 D25
2.2	ATV 11HU41M2●	GV2 ME32	24...32	> 10	LC1 D32
		DT40	32	6	LC1 D32
3-phase supply voltage: 200...230 V 50/60 Hz					
0.18	ATV 11HU05M3●	GV2 ME07	1.6...2.5	> 50	LC1 K06
		DT40	6	6	LC1 K06
0.37	ATV 11●U09M3●	GV2 ME08	2.5...4	> 50	LC1 K06
		DT40	6	6	LC1 K06
0.75	ATV 11●U18M3●	GV2 ME14	6...10	> 50	LC1 K09
		DT40	10	6	LC1 K09
1.5	ATV 11HU29M3●	GV2 ME16	9...14	> 15	LC1 K12
		DT40	16	6	LC1 K12
2.2	ATV 11HU41M3●	GV2 ME20	13...18	> 15	LC1 D18
		DT40	20	6	LC1 D18

### Combinations of circuit-breakers and add-on modules

DT40	Vigi TG40		
Rating (A)	Rating (A)	Type (3)	Sensitivity
6	25	A "si"	30 mA
10	25	A "si"	30 mA
16	25	A "si"	30 mA
20	25	A "si"	30 mA
32	40	A "si"	30 mA

#### Recommendations for special uses:

■ All RH10/RH21/RH99/RHU residual current protection devices with separate sensors are compatible as long as the type and sensitivity of the add-on modules given in the table above are observed.

■ It is advisable to connect one residual current differential safety device per drive. In this case a type B device must not be located downstream of a type A or AC device.

(1) Replace the dots in the reference according to the type of drive required, see pages 4 to 6.


(2) Replace the dots with ME for pushbutton control or with P for rotary knob control.

Type 2 coordination is provided by combining a GV2 circuit-breaker with an LC1 D●● contactor.

(3) For additional protection against direct contact, with a 3-phase power supply and access to the DC bus terminals (PA +/-PC -), the add-on module must be type B with a sensitivity of 30 mA.


# Variable speed drives for asynchronous motors Altivar 11

## ATV 11HU05●●E/U/A, ATV 11PU●●●●E/U/A

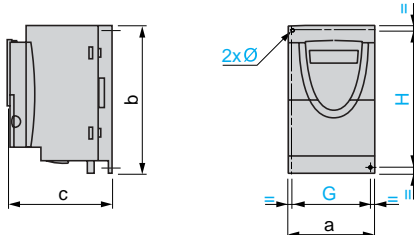


ATV 11	a	b	c	G	H	Ø
HU05●●E/U, PU●●●●E/U	72	142	101	60±1	131±1	4
HU05●●A, PU●●●●A	72	142	108	60±1	131±1	4

## ATV 11HU09●●U/A

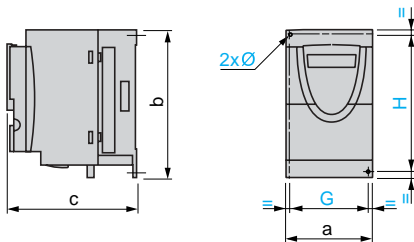


ATV 11	a	b	c	G	H	Ø
HU09●●U	72	142	125	60±1	131±1	4
HU09●●A	72	142	132	60±1	131±1	4

## ATV 11HU18M●U/A

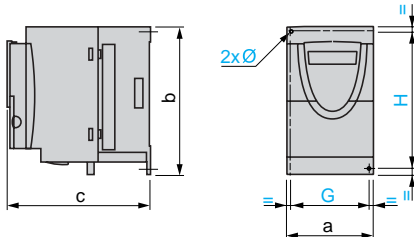


ATV 11	a	b	c	G	H	Ø
HU18M●U	72	147	138	60±1	131±1	4
HU18M●A	72	142	145	60±1	131±1	4

## EMC input filters VW3 A11401 to A11404

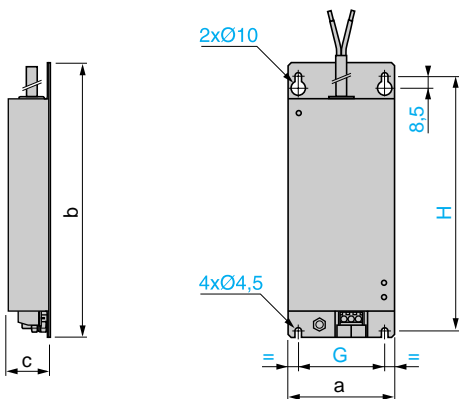


VW3	a	b	c	G	H
A11401	75	194	30	61	180
A11402	117	184	40	97	170
A11403	75	194	40	61	180
A11404	117	190	40	97	170


## ATV 11HU09M2E

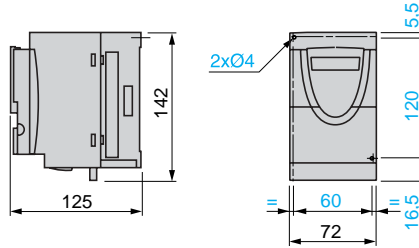

## ATV 11HU12M2E, ATV 11HU18M2E

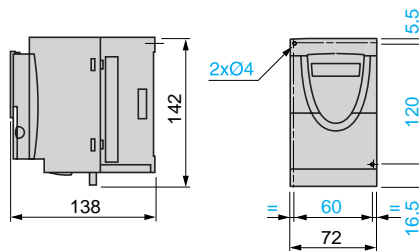

## ATV 11HU18F1U/A, ATV 11HU29M●E/U/A, ATV 11HU41M●E/U/A

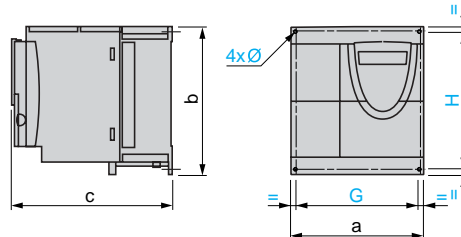


ATV 11	a	b	c	G	H	Ø
HU18F1U, HU29M●E/U, HU41M●E/U	117	142	156	106±0.5	131±1	4
HU18F1A, HU29M●A, HU41M●A	117	142	163	106±0.5	131±1	4

## Protected braking resistors VW3 A58732 and A58733


## Non protected braking resistors VW3 A58702 and A58704

(2-wire output, length 0.5 m)

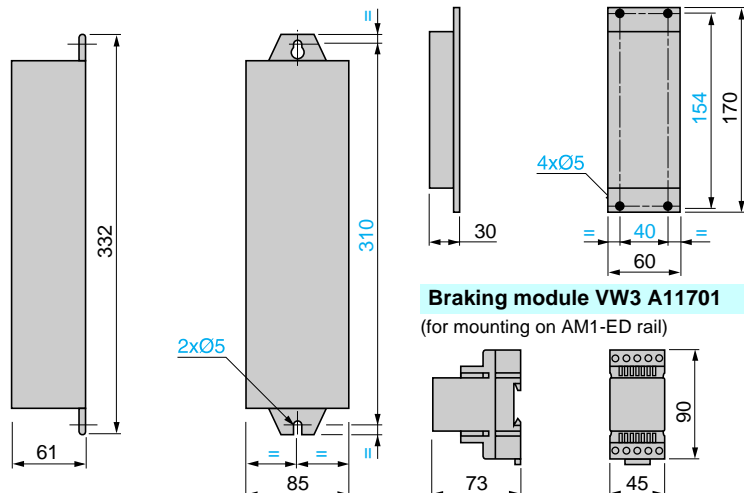


## Braking module VW3 A11701


(for mounting on AM1-ED rail)



### ATV 08 adaptor plate VW3 A11811




### EMC earthing plate VW3 A11831




- (1) 2 screws supplied for fixing the earthing plate.  
(2) 5 x Ø M4 mm screws for fixing EMC clamps.

### Mounting recommendations


- Install the unit vertically, at  $\pm 10^\circ$ .
- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate, by natural convection or by ventilation, from the bottom to the top of the unit.
- Free space in front of unit: 10 mm minimum.

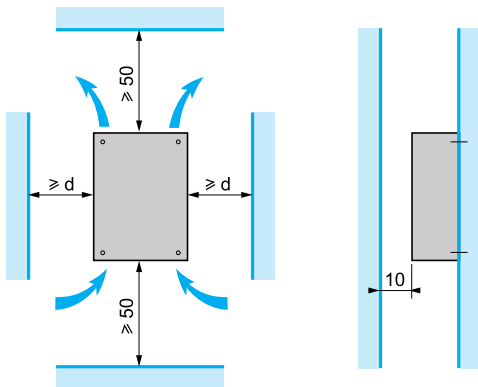

### Plates for mounting on rail VW3 A11851 and A11852

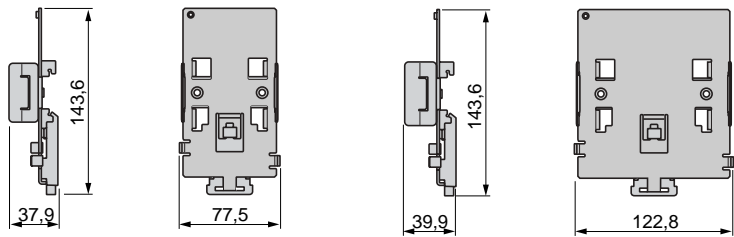

### Ventilation kit VW3 A11821



#### -10 °C to 40 °C

$d \geq 50$  mm: no special precautions.

$d = 0$  (mounted side by side): remove the protective cover from the top of the drive.


#### 40 °C to 50 °C

$d \geq 50$  mm: remove the protective cover from the top of the drive.

#### 50 °C to 60 °C

$d \geq 50$  mm: remove the protective cover from the top of the drive, and derate the nominal current of the drive by 2.2 % per °C above 50 °C.

### Recommendations for mounting on a machine frame (specific to ATV 11PU●●●● drives)

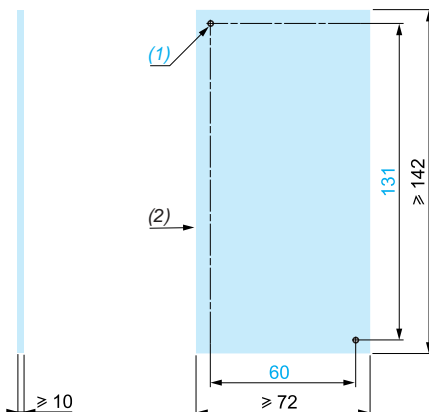

- (1) 2 x Ø M4 tapped holes.  
(2) Minimum machined area

ATV 11PU●●●● drives can be mounted on (or in) a steel or aluminium machine frame, observing the following conditions:


- maximum ambient temperature: 40 °C,
- vertical mounting  $\pm 10^\circ$ ,
- the drive must be fixed at the centre of a support (frame) which is a minimum of 10 mm thick and with a minimum cooling area of 0.12 m<sup>2</sup> for steel and 0.09 m<sup>2</sup> for aluminium, exposed to the open air,
- support area for the drive (142 x 72 min) machined on the frame with a surface smoothness of 100 µm max and an unevenness of 3.2 µm max,
- mill the tapped holes lightly in order to remove any burrs,
- coat the whole drive support area with thermal contact grease (or equivalent),

When the operating conditions are close to the maximum limits (power, cycle and temperature), this type of use must be checked beforehand, by monitoring the thermal state of the drive.




## Schemes with contactor


### 3-phase power supply ATV 11●●●●M3●

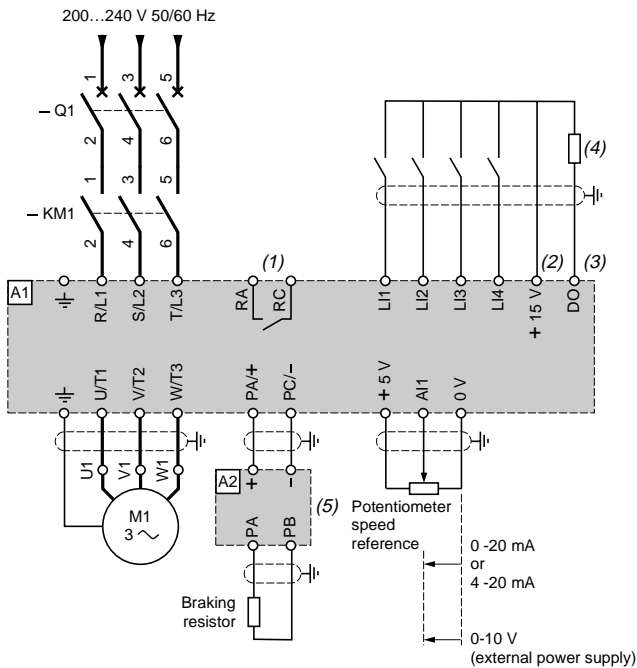


## Single phase power supply ATV 11●●●●F1● and ATV 11●●●●M2●

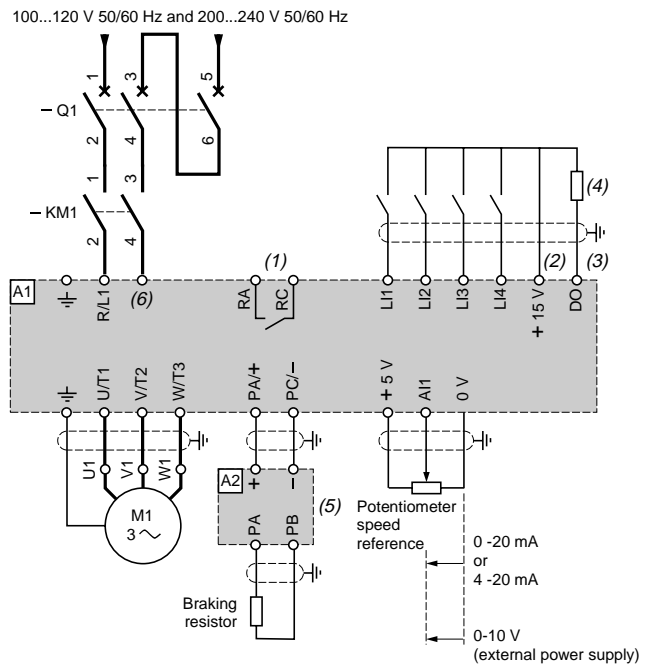

## 2-wire control




### 3-wire control




### Analog voltage input

External 10 V use



### Analog current input

0-20 mA or 4-20 mA



For combinations of KM1, Q1, etc, components (see the table on page 11).

- (1) Fault relay contact: for remote signalling of drive status.  
 (2) Internal +15 V. If an external +24 V supply is used, connect the 0 V on the external supply to the 0 V terminal, do not use the + 15 terminal on the drive, and connect the common of the LI inputs to the + 24 V of the external supply.  
 (3) DO output: can be configured as an analog or a logic output. Internal voltage + 15 V or external + 24 V.  
 (4) Galvanometer or low level relay.  
 (5) Braking module VW3 A11701, if braking resistor VW3 A587●● is used.  
 (6) N for ATV 11●●●●F1,  
     S/L2 for ATV 11●●●●M2●.

**Note:** fit interference suppressors to all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

# Variable speed drives for asynchronous motors

Altivar 11


Electromagnetic compatibility

## Connections to meet the requirements of EMC standards

### Principle

- Earths between the drive, the motor and the cable shielding must have "high frequency" equipotentiality.
- Use shielded cables with shielding connected to earth at 360° at both ends for the motor cables, and if necessary the braking module and resistor and control-signalling cables. Conduit or metal ducting can be used for part of the shielding length provided that there is no break in continuity.
- Ensure maximum separation between the power supply cable (line supply) and the motor cable.

### Installation diagram for ATV 11●U●●●●E/U/A

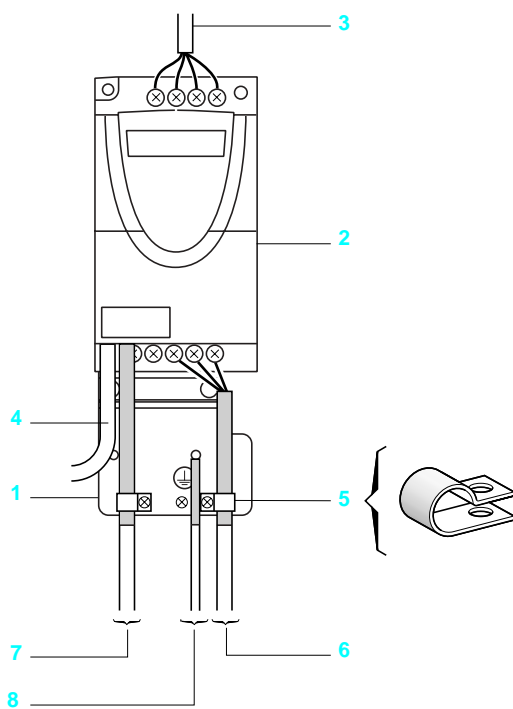


- 1 Earthing plate VW3 A11831 to be fitted on the drive.
- 2 Altivar 11.
- 3 Non-shielded power supply cable.
- 4 Non-shielded cable for fault relay contacts output.
- 5 Fix and earth the shielding of cables 6 and 7 as close as possible to the drive:
  - strip the shielding,
  - use cable clamps of an appropriate size on the parts from which the shielding has been stripped, to attach them to the earthing plate,
  - the shielding must be clamped tightly enough to the earthing plate to ensure good contact,
  - types of clamp: non-oxidizing metal.
- 6 Shielded cable (1) for connecting the motor.
- 7 Shielded cable (1) for connecting the control/signalling system. For applications which require a large number of conductors, small cross-sections must be used (0.5 mm²).
- 8 PE cable.

(1) The shielding of cables (6, 7 and 8) must be connected to earth at both ends. The shielding must be continuous and if intermediate terminals are used, they must be in EMC metal boxes.

**Note:** if using an additional input filter, it must be mounted under the drive and connected directly to the line supply via a non-shielded cable. Link 3 on the drive is then via the filter output cable.


Although there is an HF equipotential earth connection between the drive, the motor and the cable shielding, it is still necessary to connect the PE protective conductors (green-yellow) to the appropriate terminals on each of the devices.

531819

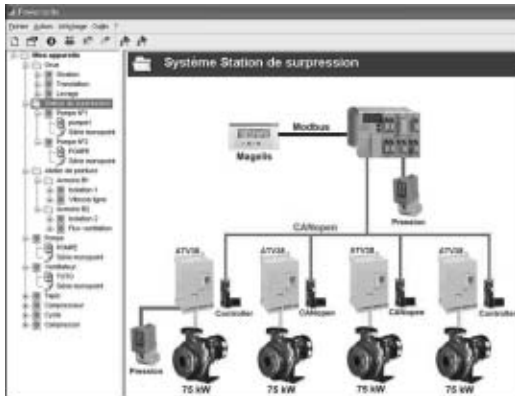


PowerSuite with PC screen  
Installation management

531820

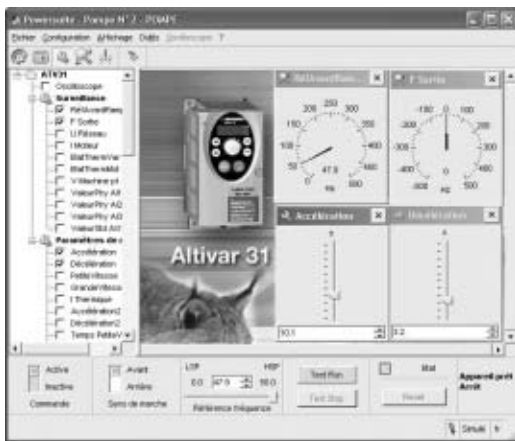

PowerSuite with PC screen  
Monitoring screen

531440

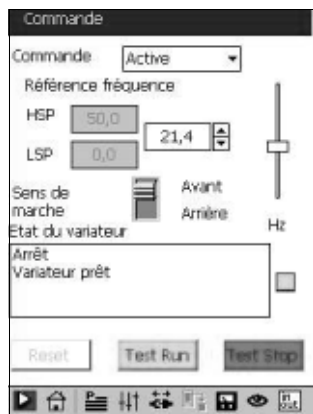

PowerSuite with Pocket PC screen

## Presentation

The PowerSuite software workshop, for PC or Pocket PC, is designed for setting up Telemecanique starters and variable speed drives.

This single program is an easy-to-use interface for configuring Altistart and Tesys model U starters as well as all Altivar drives in a Microsoft Windows® environment, in five languages (English, French, German, Italian and Spanish).

## Functions

The PowerSuite software workshop can be used for preparing, programming, setting up and maintaining Telemecanique starters and variable speed drives.

The PowerSuite software workshop can be used:

- stand alone to prepare and store starter or drive configuration files,
- connected to the starter or drive to:
  - configure,
  - adjust,
  - monitor (except for Altivar 11 drives),
  - control (except for Altivar 11 drives),
  - transfer and compare configuration files between PowerSuite and the starter or drive.

The configuration files generated by the PowerSuite software workshop can be:

- saved to hard disk, CD-Rom, floppy disk, etc...
- printed,
- exported to office automation software applications,
- exchanged between a PC and a Pocket PC using standard synchronization software. PowerSuite PC and Pocket PC configuration files have the same format,
- they are password protected.

The software associated with the Altivar 31 has been enhanced to include: oscilloscope function, parameter name customisation, creation of a user menu, creation of monitoring screens, searching and sorting on different parameters. The PowerSuite software workshop has on-line contextual help.


## Connections

- The PowerSuite software workshop can be connected directly to the terminal port on the starter or variable speed drives, via the serial port on the PC or Pocket PC. Two types of connection are possible:
  - either with a single starter or drive (point to point connection)
  - or with a group of starters or drives (multi-point connection).
- The PowerSuite software workshop for PC can be connected to an Ethernet network. In this case the starters and drives can be accessed using:
  - either an Ethernet-Modbus 174 bridge CEV 300 20,
  - or a communication option card VW3 A58310 (for Altivar 38, 58 and 58F drives only).


## Hardware and software environment

- The PowerSuite for PC software workshop can operate in the following PC environments and configurations:
  - Microsoft Windows® 95 OSR2, Microsoft Windows® 98 SE, Microsoft Windows® NT4 X SP5, Microsoft Windows® Me, Microsoft Windows® 2000, Microsoft Windows® XP,
  - Pentium III, 800 MHz, hard disk with 300 Mb available, 128 Mb RAM,
  - SVGA or higher definition monitor
- The PowerSuite for Pocket PC software workshop, version V2.0.0, is compatible with Pocket PCs equipped with Windows for Pocket PC 2002 or 2003 operating system and an ARM or XSCALE processor. Performance tests for version V2.00 of the PowerSuite software workshop have been carried out on the following Pocket PCs:
  - Hewlett Packard® IPAQ 2210,
  - Compaq® IPAQ series 3800 and 3900,
  - Hewlett Packard® Jornada series 560.

## References



VW3 A8101



VW3 A8102

### PowerSuite software workshop for PC or Pocket PC (1)

Description	Composition	Reference	Weight kg
<b>PowerSuite for PC kit</b>	<ul style="list-style-type: none"> <li>1 PowerSuite CD-Rom</li> <li>1 PC connection kit.</li> </ul>	<b>VW3 A8101</b>	0.400
<b>PowerSuite for Pocket PC kit (2)</b>	<ul style="list-style-type: none"> <li>1 PowerSuite CD-Rom,</li> <li>1 Pocket PC connection kit.</li> </ul>	<b>VW3 A8102</b>	0.400
<b>PowerSuite CD-Rom</b>	<ul style="list-style-type: none"> <li>Software for PC and Pocket PC in English, French, German, Italian and Spanish,</li> <li>technical documentation and ABC configurator program.</li> </ul>	<b>VW3 A8104</b>	0.100
<b>PowerSuite upgrade CD</b>	<ul style="list-style-type: none"> <li>Software for PC and Pocket PC in English, French, German, Italian and Spanish,</li> <li>technical documentation and ABC configurator program.</li> </ul>	<b>VW3 A8105</b>	0.100
<b>PC connection kit</b>	<ul style="list-style-type: none"> <li>2 x 3 m connection cables with 2 x RJ 45 connectors,</li> <li>1 RJ 45/9-way SUB-D adapter for connecting ATV 58/58F/38 drives,</li> <li>1 RJ 45/9-way SUB-D adapter for connecting ATV 68 drives,</li> <li>1 converter marked "RS 232/RS 485 PC" with one 9-way female SUB-D connector and one RJ 45 connector,</li> <li>1 converter for ATV 11 drives, with one 4-way male connector and one RJ 45 connector.</li> </ul>	<b>VW3 A8106</b>	0.350
<b>Pocket PC connection kit (2)</b>	<ul style="list-style-type: none"> <li>2 x 0.6 m connection cables with 2 x RJ 45 connectors,</li> <li>1 RJ 45/9-way SUB-D adapter for connecting ATV 58/58F/38 drives,</li> <li>1 converter marked "RS 232/RS 485 PPC" with one 9-way male SUB-D connector and one RJ 45 connector,</li> <li>1 converter for ATV 11 drives, with one 4-way male connector and one RJ 45 connector.</li> </ul>	<b>VW3 A8111</b>	0.300

(1) To find out about the latest available version, please consult your Regional Sales Office.

(2) These kits connect to the synchronization cable, which must be ordered separately from your Pocket PC supplier.

## Compatibility

Compatibility of the PowerSuite software workshop with starters and variable speed drives		Starter-controller	Soft start/soft stop unit	Variable speed drives					
		TeSys model U	ATS 48	ATV 11	ATV 28	ATV 31	ATV 38	ATV 58 ATV 58F	ATV 68
<b>PowerSuite software workshop with serial link for PC</b>									
Kit and CD-Rom	VW3 A8101 VW3 A8104 VW3 A8105	≥ V 1.40	≥ V 1.30	≥ V 1.40	≥ V 1.0	≥ V 2.0.0	≥ V 1.40	≥ V 1.0	≥ V 1.50
<b>PowerSuite software workshop with Ethernet link for PC</b>									
Kit and CD-Rom	VW3 A8101 VW3 A8104 VW3 A8105	—	≥ V 1.50 and Ethernet-Modbus bridge	—	≥ V 1.50 and Ethernet-Modbus bridge	≥ V 2.0.0 and Ethernet-Modbus bridge	≥ V 1.50 and Ethernet V2 communication card or bridge	—	—
<b>PowerSuite software workshop for Pocket PC</b>									
Kit and CD-Rom	VW3 A8102 VW3 A8104 VW3 A8105	≥ V 1.50	≥ V 1.30	≥ V 1.40	≥ V 1.20	≥ V 2.0.0	≥ V 1.40	≥ V 1.20	—

Compatible products and software versions.  
Non compatible products.

### Compatibility of the PowerSuite software workshops with Pocket PCs

Operating system	Performance tests carried out on models	PowerSuite software version			
		V 1.30	V 1.40	V 1.50	V 2.0.0
Windows for Pocket PC 2003	Hewlett Packard® IPAQ 2210	no	no	no	yes
Windows for Pocket PC 2002	Compaq® IPAQ series 3800, 3900	no	no	yes	yes
	Hewlett Packard® Jornada series 560	no	yes	yes	yes
Windows for Pocket PC 2000	Hewlett Packard® Jornada series 525	yes	yes	yes	no
Windows CE	Hewlett Packard® Jornada 420	yes	no	no	no

# Variable speed drives for asynchronous motors Altivar 11

## Summary of functions

Operating speed range	page 19
Acceleration and deceleration ramp times	page 19
Second ramp	page 19
Deceleration ramp adaptation	page 19
Preset speeds	page 20
Configuration of analog input AI1	page 20
Analog or logic output DO	page 20
Forward/reverse operation	page 20
2-wire control	page 21
3-wire control	page 21
Automatic d.c. injection	page 21
Switching frequency, noise reduction	page 21
Fault relay, unlocking	page 21
Fault reset	page 22
Automatic restart	page 22
Automatic catching a spinning load with speed detection	page 22
Controlled stop on loss of line supply	page 22
Thermal protection of drive	page 22
Motor thermal protection	page 22
Monitoring	page 23
<b>Incompatible functions</b>	page 23
<b>Functions specific to the Asia range</b>	page 23


## Drive factory setting

To facilitate the setting up of the drive, the functions have been programmed to meet the requirements of the most common applications.

### Drive functions and I/O:

- 2-wire control on transition:
  - logic input LI1: forward.
  - logic input LI2: reverse.
- Preset speeds:
  - logic input LI3: preset speeds.
  - logic input LI4: preset speeds.
- Analog input AI1: 0-5 V speed reference.
- Logic/analog output DO: motor frequency (analog).
- Deceleration ramp adaptation.
- Automatic d.c. current injection for 0.5 s to standstill.

## Functions of the display and the keys

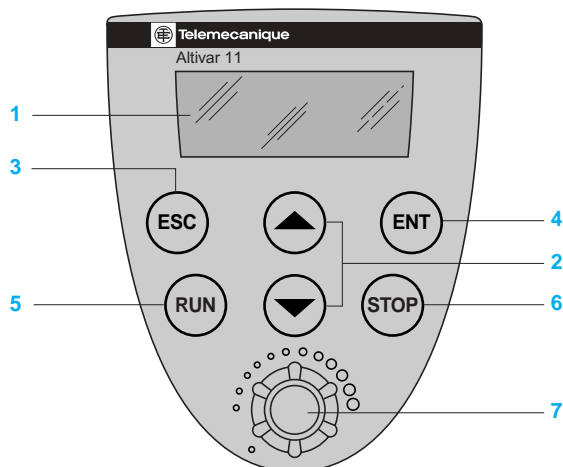


- 1 Information is displayed in the form of codes or values in three "7-segment" displays
  - 2 Buttons for scrolling through the menus or modifying values
  - 3 "ESC": button for exiting the menus (no confirmation).
  - 4 "ENT": validation button for entering a menu or confirming the new value selected.
- Only on the Asia range:
    - 5 "RUN": local control of motor operation.
    - 6 "STOP": local control of motor stopping.
    - 7 Speed reference potentiometer.

# Variable speed drives for asynchronous motors Altivar 11



## ■ Operating speed range

Used to determine the 2 frequency limits which define the speed range permitted by the machine under actual operating conditions.

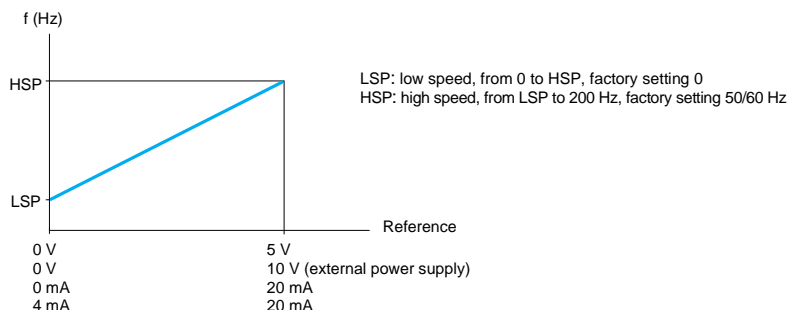

## ■ Acceleration and deceleration ramp times


Used to define acceleration and deceleration ramp times according to the application and the machine dynamics.

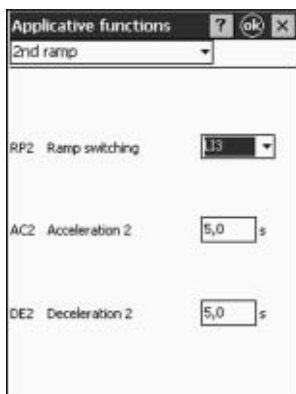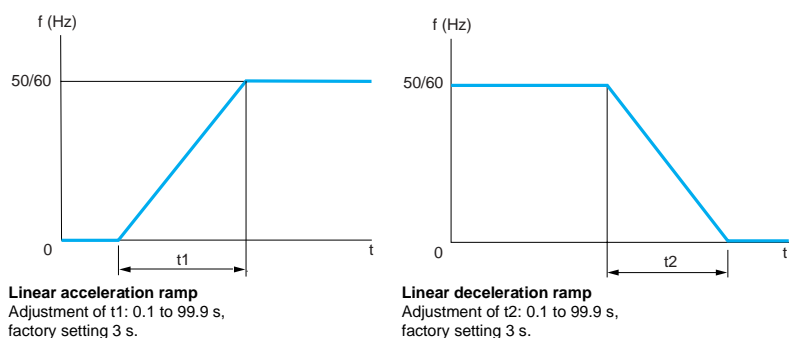

Adjustment of second ramp with  
PowerSuite Pocket PC

## ■ Second ramp

Used to switch 2 acceleration or deceleration ramp times, which can be adjusted separately. Enabled by means of 1 reassignable logic input. It is suitable for machines with fast continuous speed correction and high speed lathes with acceleration and deceleration limiting above certain speeds.

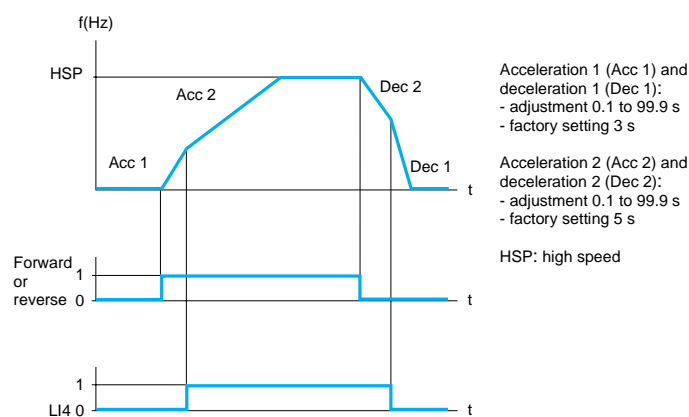


Example of switching using logic input LI4

## ■ Deceleration ramp adaptation

Used to automatically increase the deceleration ramp time if the initial setting is too low when the load inertia is taken into account. This function prevents the drive locking if there is an **overvoltage on deceleration** fault. If this function is disabled, an appropriate braking module and resistor can be used.

# Variable speed drives for asynchronous motors Altivar 11

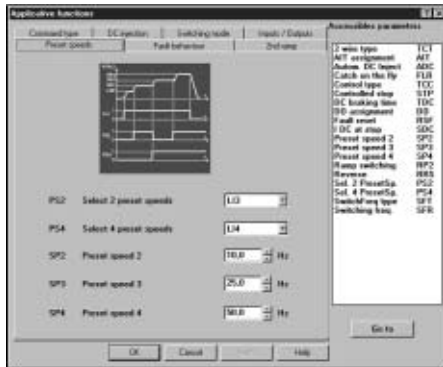

Adjusting the preset speeds with the PowerSuite software workshop for PC


## ■ Preset speeds

Used to switch preset speed references.  
Choice between 2 or 4 preset speeds.

Enabled via 1 or 2 logic inputs.

The preset speeds can be adjusted in increments of 0.1 Hz from 0 Hz to 200 Hz.

They take priority over the reference given via the analog input or, for the Asia range, on the drive's potentiometer.

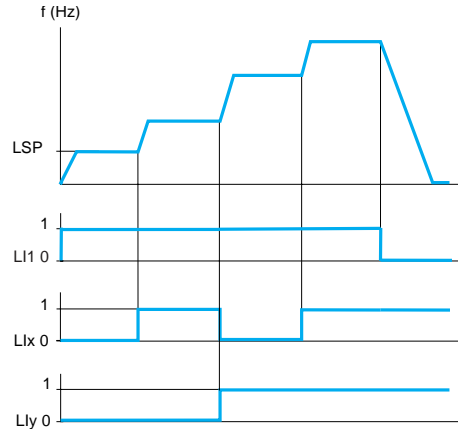

The speed obtained with inputs L1x and L1y at state 0 is LSP or the speed reference, depending on the level of analog input AI1.

Factory settings:

1<sup>st</sup> speed : LSP (low speed or reference)

2<sup>nd</sup> speed: 10 Hz

3<sup>rd</sup> speed: 25 Hz

4<sup>th</sup> speed: 50 Hz

Example of operation with 4 preset speeds.

## ■ Configuration of analog input AI1

This is used to modify the characteristics, for either voltage or current, of analog input AI1.

Factory setting: 0-5 V (internal power supply only).



Other possible values via external power supplies: 0-10 V, 0-20 mA, 4-20 mA.

### Analog voltage input

Use with external 10 V

### Analog current input

0-20 mA or 4-20 mA use




## ■ Analog or logic output DO


Output DO can be programmed to be a logic output or an analog output. It enables remote signalling of the following information as required:

- ☐ frequency threshold reached (logic output),
- ☐ reference reached (logic output),
- ☐ current threshold reached (logic output),
- ☐ current in the motor (analog output),
- ☐ motor frequency (analog output).

### Diagram with internal power supply



### Diagram with external power supply



If it is a logic output: Z is a relay or a low level input.

If it is an analog output: Z can be, for example, a galvanometer.

For a galvanometer with resistance R, the maximum voltage supplied will be:

$$U_x \frac{R(\Omega)}{R(\Omega) + 1000(\Omega)}$$

## ■ Direction of operation: forward/reverse


In 2-wire control, forward operation cannot be reassigned to any logic input other than LI1.

In 3-wire control, stopping cannot be reassigned to any logic input other than LI1, and forward operation cannot be reassigned to any logic input other than LI2.

Reverse operation can be disabled for applications with a single direction of motor rotation, by not assigning any logic input to reverse operation.



# Variable speed drives for asynchronous motors Altivar 11

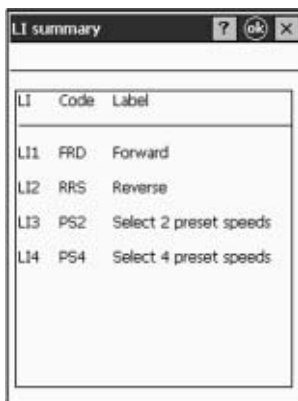


Assignment of logic inputs with  
PowerSuite Pocket PC

## ■ 2-wire control

Used to control the direction of operation by means of a maintained contact. Run (forward or reverse) and stop are controlled by the same logic input. Enabled by means of 1 or 2 logic inputs (one or two directions). This function is suitable for all non-reversing and reversing applications.

### 3 operating modes are possible:


- ☐ detection of the state of the logic inputs,
- ☐ detection of a change in state of the logic inputs,
- ☐ detection of the state of the logic inputs with forward operation always having priority over reverse.

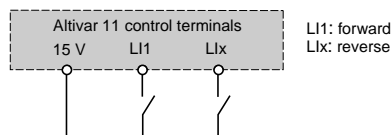


Wiring diagram for 2-wire control

## ■ 3-wire control


Used to control the operating direction and stopping by means of pulsed contacts. Run (forward or reverse) and stop are controlled by 2 different logic inputs. Enabled by means of 2 or 3 logic inputs (non-reversing or reversing). This function is suitable for all non-reversing and reversing applications.

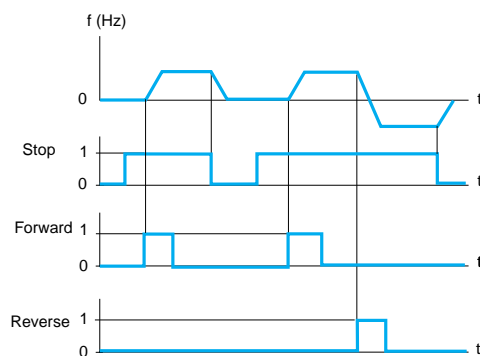

Example of operation with 3-wire control

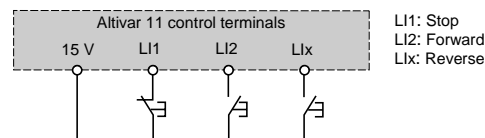

Wiring diagram for 3-wire control

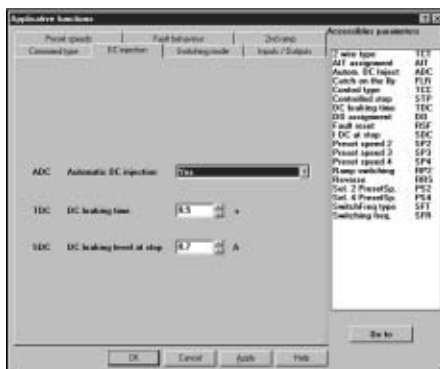

Adjustment of the "d.c. injection" function using the  
PowerSuite software workshop for PC

## ■ Automatic d.c. injection

Enables d.c. injection to standstill, which is adjustable from 0 to 1.2 times the value of the drive nominal current (preset at 0.7  $I_n$ ), as soon as operation is no longer controlled and the motor speed is zero:

- ☐ either for a period of time, which is adjustable from 0.1 to 30 s (preset at 0.5 s)
- ☐ or continuously.

Factory setting: function active with d.c. injection for 0.5 s.

In 3-wire control, d.c. injection is only active if logic input LI1 is active (stop).

## ■ Switching frequency, noise reduction

High frequency switching of the intermediate d.c. voltage can be used to supply the motor with a current wave with low harmonic distortion.

There are 3 ranges of switching frequency:

- ☐ random switching frequency around 2 or 4 kHz (avoids resonance),
- ☐ fixed low frequency adjustable to 2 or 4 kHz,
- ☐ fixed high frequency adjustable to 8, 12 or 16 kHz.

Factory setting: Low frequency set at 4 kHz.

This function is suitable for all applications which require low motor noise.

## ■ Fault relay, unlocking

The fault relay is energised when the drive is powered up and is not faulty.

It opens in the event of a fault or when the drive is powered down.

The drive can be unlocked after a fault in one of the following ways:

- ☐ powering down the drive until the display disappears completely, then powering back up,
- ☐ activating the logic input associated with the "fault reset" function, if the function is enabled,
- ☐ enabling the "automatic restart" function.

# Variable speed drives for asynchronous motors

## Altivar 11

### ■ Fault reset

Used to clear the stored fault and restart the drive if the cause of the fault has disappeared. The fault is cleared by a transition of the logic input LI which is assigned to this function. Factory setting: function inactive. The restart conditions after a reset to zero are the same as those of a normal power-up. The following faults can be reset: drive thermal overload, motor thermal overload, line supply overvoltage, overvoltage on deceleration, overspeed, line phase loss (1), line supply undervoltage (2).

### ■ Automatic restart

Enables the drive to be restarted automatically after locking following a fault if this fault has disappeared and if the other operating conditions permit a restart. This restart is performed by a series of automatic attempts separated by increasingly longer waiting periods: 1 s, 5 s, 10 s, then 1 minute for the following periods. If the drive has not restarted after 6 minutes, the drive locks and the procedure is abandoned until the drive is powered down and back up again. Factory setting: function inactive.

Restart authorised with the following faults: drive thermal overload, motor thermal overload, line supply overvoltage, overvoltage on deceleration, line phase loss (1), line supply undervoltage (2). If the function is enabled, the drive's safety relay remains activated until one of these faults appears. This function requires the speed reference and the direction of operation to be maintained, and is only compatible with 2-wire level control. This function is suitable for machines or installations in continuous operation or without monitoring, and where a restart will not endanger equipment or personnel in any way.

### ■ Automatic catching a spinning load with speed detection ("catch-on-the-fly")

Used to restart the motor smoothly after one of the following events:

- ☐ loss of line supply or power off,
- ☐ fault reset or automatic restart,
- ☐ "freewheel stop" triggered by a fault.

On restarting, the effective speed of the motor is detected in order to restart on the ramp at this speed and return to the reference speed. The speed detection time can be up to 1 s depending on the initial deviation.

Factory setting: function inactive.

This function requires the activation of 2-wire level control and is not compatible with the continuous d.c. injection function.

This function is suitable for machines for which the loss of motor speed is negligible during the line supply loss time (machines with high inertia).


### ■ Controlled stop on loss of line supply

Used to define the drive stopping modes at a "loss of line supply" fault.

**Three stopping modes are available for selection:**

- ☐ "freewheel" stop: the drive locks and the motor stops in accordance with the inertia and the resistive torque,
- ☐ normal stop: stop with valid deceleration ramp time (deceleration 1 or 2),
- ☐ fast stop: the stopping time depends on the inertia and the braking ability of the drive.

Factory setting: "freewheel" stop.

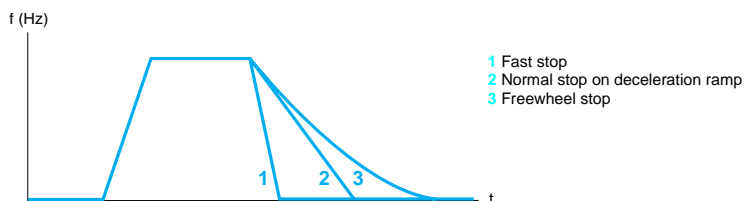


- (1) The line supply phase loss fault is only accessible on drives with 3-phase power supply, if monitoring of the fault has been enabled (factory setting: enabled).  
 (2) The drive will restart as soon as the undervoltage fault disappears, whether or not the function is active.



Adjustment of the behaviour at a fault with PowerSuite Pocket PC

# Variable speed drives for asynchronous motors

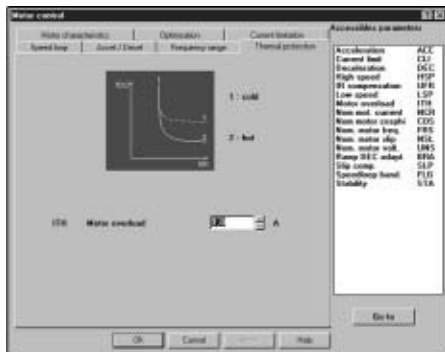

### Adjusting the thermal protection with the PowerSuite software workshop for PC

- Thermal protection of drive

Direct protection by thermistor, integrated in the drive's power module. This protects the components, even in the event of poor ventilation or excessive ambient temperature. When the fault is detected, it locks the drive.

- **Motor thermal protection**


Motor thermal protection is implemented via continuous calculation of its theoretical temperature rise.

The drive is locked on a fault if this temperature rise exceeds 118% of the nominal temperature rise.

This function is suitable for applications with self-cooled motors and thermal derating based on the rotor frequency.

**Note: the thermal state of the motor is not stored when the drive is powered down.**

K coefficient to be applied to the preset lth (actual lth = K x preset lth)

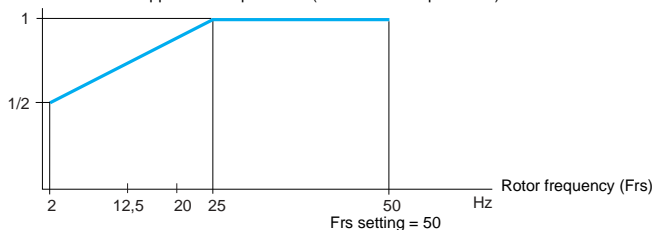

## ■ Monitoring

The display shows the state of the drive or, if selected, one of the following values:

- ☐ frequency reference,
- ☐ output frequency applied to the motor,
- ☐ motor current,
- ☐ line voltage,
- ☐ motor thermal state,
- ☐ drive thermal state.

## Incompatible functions

The choice of the last function configured is enabled, whatever the configuration of the previous functions.

Application functions can be assigned to the same logic input, in which case one logic input enables a number of functions (for example: direction of operation and 2nd ramp).

**A check must be carried out to ensure that the functions are compatible.**

- **Direction of operation and 2-wire control:** forward operation can only be assigned to LI1.
- **Direction of operation and 3-wire control:** forward operation can only be assigned to LI2.
- **Automatic restart:** requires the configuration of 2-wire level control. Changing the configuration of the type of control disables automatic restart.
- **Automatic catching a spinning load with speed detection:**
  - requires the configuration of 2-wire level control. Changing the configuration of the type of control disables automatic catching a spinning load.
  - not compatible with continuous d.c. injection braking to a standstill. Configuring this function disables automatic catching a spinning load.

## Functions specific to the Asia range

- Local control:

The keypad on the Asia range has 2 additional keys (RUN and STOP) and a potentiometer (speed reference).

- The keys and the potentiometer are active if local control is enabled.
  - The logic and analog inputs are inactive if local control is enabled.
  - **Reverse:** if local control is active, the reverse function is not visible.
- Factory setting: function active.

- Logic inputs:

It is possible to choose the active level of the logic input.

Positive logic: the inputs are active if the signal is  $\geq 11\text{ V}$ .

Negative logic: the inputs are active if the signal is  $\leq 5$  V.

Factory setting: positive logic.